

### MEF Evolution End Feed

Cod. 10001424



Evolution : a brand new mini applicator line offering the same quality level and reliability over the time of all Makfil's products.

The Evolution has been competitively priced, thanks to the specific production technologies adopted that have reduced the production time and made this tool the undisputed reference for the world wide market, both for quality and price.

Mini applicator for terminals linked « end to end » rolled over a reel, with thickness <0.6 mm, terminal pitch <27 mm, wire section between 0 and 6 mm<sup>2</sup>. Mechanical « end-feed » feeding system (no pneumatic version available).

Can be supplied either with a continuous or a four-pad regulating head.

It is supplied with a non-resettable 7-digit cycle counter, and with both cams either for terminal feeding on upstroke or downstroke.

It is supplied with a complete technical documentation containing all the information needed to safely use and correctly maintain the equipment.

#### Technical Data

Crimping height: 135.8 mm (5.346")

Wire section: max 6 mm<sup>2</sup> (9 AWG)

Stroke: 40/30 mm (1.575"/1.18")

Feeding system: Mechanical

Terminal pitch: < 28 mm (< 1.10")

Weight: 3 Kg (6.6 lbs)

Terminal thickness:  
max. 0.6 mm (0.023")

Dimensions:  
(L) 190mm x (W) 66mm x (H) 145.5mm  
(L) 7.48" x (W) 2.59" x (H) 5.72"

#### Optional:

Continuous regulating head, 0.02 mm (0.00078") resolution, 2.7 mm (0.106") range.

### MES Evolution Side Feed

Cod. 10001425



Evolution : a brand new mini applicator line offering the same quality level and reliability over the time of all Makfil's products.

The Evolution has been competitively priced, thanks to the specific production technologies adopted that have reduced the production time and made this tool the undisputed reference for the world wide market, both for quality and price.

Mini applicator for linked terminals, with thickness <0.6 mm, terminal pitch <27mm, wire section between 0 and 6mm<sup>2</sup>. Mechanical « side-feed » feeding system (no pneumatic version available) for linked terminals on a reel to be unrolled left to right.

Can be supplied either with a continuous or a fourpad regulating head.

It is supplied with a non-resettable 7-digit cycle counter, and with both cams either for terminal feeding on upstroke or downstroke.

It is supplied with a complete technical documentation containing all the information needed to safely use and correctly maintain the equipment.

#### Technical Data

Crimping height: 135.8 mm (5.346")

Wire section: max 6 mm<sup>2</sup> (9 AWG)

Stroke: 40/30 mm (1.575"/1.18")

Feeding system: Mechanical

Terminal pitch: < 28 mm (< 1.10")

Weight: 3 Kg (6.6 lbs)

Terminal thickness:  
max. 0.6 mm (0.023")


Dimensions:  
(L) 190mm x (W) 144mm x (H) 145.5mm  
(L) 4.13" x (W) 5.66" x (H) 5.73"

#### Optional:

Continuous regulating head, 0.02 mm (0.00078") resolution, 2.7 mm (0.106") range.

### MRF Restyling End Feed

**Cod. 10001426**

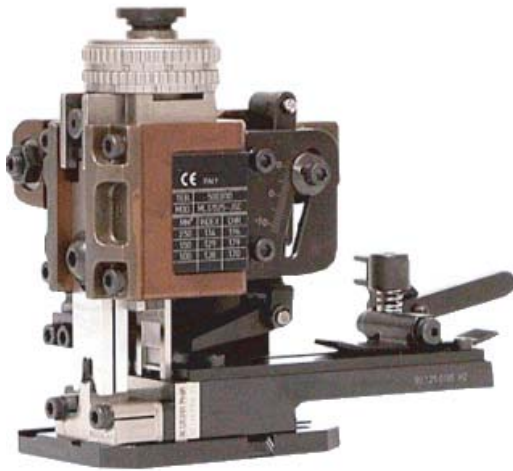

Mini applicator for terminals linked « end to end », rolled over a reel, with thickness < 1.2mm, terminal pitch < 27mm, wire section between 0 and 10 mm<sup>2</sup>. Mechanical « end-feed » feeding system.

Can be supplied either with a continuous or a four-pad regulating head.

It is supplied with a non-resettable 7-digit cycle counter, and with both cams either for terminal feeding on upstroke or downstroke.

Can be fitted to any crimping press having a crimping height (measured from the mini applicator mounting plate to the press « T » coupling when at Bottom Dead Center) of 135.8mm ± 0.02mm, and can be used in both manual (for bench-top press) and automatic (for cut and strip machine) configuration.

It is supplied with a complete technical documentation containing all the information needed to safely use and correctly maintain the equipment.

#### Technical Data

Crimping height: 135.8 mm (5.346")

Wire section: max 10 mm<sup>2</sup> (7 AWG)

Stroke: 40/30 mm (1.575"/1.18")

Feeding system: Mechanical

Terminal pitch: < 27 mm (< 1.06")

Weight: 4 Kg (8.8 lbs)

Terminal thickness: < 1.2 mm (< 0.047")

Dimensions:


Optional:

Continuous regulating head, 0.02 mm (0.00078") resolution, 2.7 mm (0.106") range.

(L) 196.5mm x (W) 72mm x (H) 145.5mm  
(L) 7.73" x (W) 2.83" x (H) 5.72"

### MRS Restyling Side Feed

**Cod. 10001427**

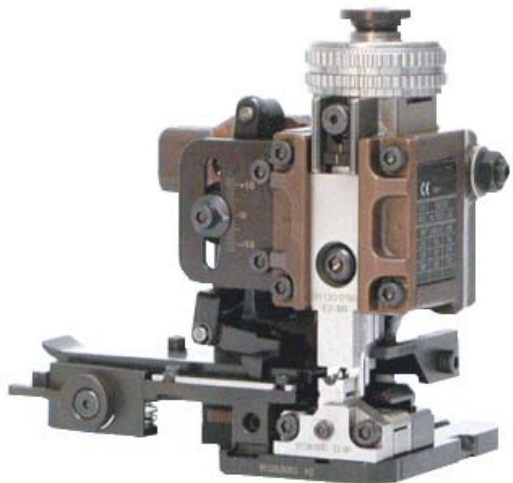

Mini Applicator for linked terminals with thickness < 1.2 mm, pitch < 27 mm, wire section between 0 and 10 mm<sup>2</sup>. Mechanical « side-feed » feeding system for linked terminals on a reel to be unrolled left to right.

Can be supplied either with a continuous or a four-pads regulating head.

It is supplied with a non-resettable 7-digit cycle counter, and with both cams either for terminal feeding on upstroke or on downstroke.

Can be fitted to any crimping press having a crimping height (measured from the mini applicator mounting plate to the press « T » coupling when at Bottom Dead Centre) of 135.8mm ± 0.02mm, and can be used in both manual (for bench-top press) and automatic (for cut and strip machine) configuration.

It is supplied with a complete technical documentation containing all the information needed to safely use and correctly maintain the equipment.

#### Technical Data

Crimping height: 135.8 mm (5.346")

Wire section: max 10 mm<sup>2</sup> (7 AWG)

Stroke: 40/30 mm (1.575"/1.18")

Feeding system: Mechanical

Terminal pitch: < 27 mm (< 1.06")

Weight: 3,9 Kg (8.6 lbs)

Terminal thickness: < 1.2 mm (< 0.047")

Dimensions:

Optional:

Continuous regulating head, 0.02 mm (0.00078") resolution, 2.7 mm (0.106") range.

(L) 105mm x (W) 144mm x (H) 145,5mm  
(L) 4.13" x (W) 5.66" x (H) 5.72"

MAKFIL SYSTEM reserves the right to change the data in this catalogue without prior notice

Our agent:

**MAKFIL SYSTEM**

MAKFIL SYSTEM s.r.l

40016 S.Giorgio di Piano (BO) - Italy

Via dell'Artigiano, 12

TEL. +39-051-893445 - Fax +39-051-893694

Internet <http://www.makfil.it>